



DELTA ELECTRONICS, INC.  
www.delta.com.tw/industrialautomation

### **IABU Headquarters**

#### **Delta Electronics, Inc.**

##### **Taoyuan1**

31-1, Xingbang Road, Guishan Industrial Zone,  
Taoyuan County 33370, Taiwan, R.O.C.  
TEL: 886-3-362-6301 / FAX: 886-3-362-7267

### **Asia**

#### **Delta Electronics (Jiang Su) Ltd.**

##### **Wujiang Plant3**

1688 Jiangxing East Road,  
Wujiang Economy Development Zone,  
Wujiang City, Jiang Su Province,  
People's Republic of China (Post code: 215200)  
TEL: 86-512-6340-3008 / FAX: 86-512-6340-7290

#### **Delta Greentech (China) Co., Ltd.**

238 Min-Xia Road, Cao-Lu Industry Zone, Pudong, Shanghai,  
People's Republic of China  
Post code : 201209  
TEL: 021-58635678 / FAX: 021-58630003

#### **Delta Electronics (Japan), Inc.**

##### **Tokyo Office**

Delta Shibadaimon Building, 2-1-14  
Shibadaimon, Minato-Ku, Tokyo, 105-0012,  
Japan  
TEL: 81-3-5733-1111 / FAX: 81-3-5733-1211

#### **Delta Electronics (Korea), Inc.**

234-9, Duck Soo Building 7F, Nonhyun-Dong,  
Kangnam-Gu, Seoul, Korea 135-010  
TEL: 82-2-515-5305 / FAX: 82-2-515-5302

#### **Delta Electronics (Singapore) Pte. Ltd.**

8 Kaki Bukit Road 2, #04-18 Ruby Warehouse Complex,  
Singapore 417841  
TEL: 65-6747-5155 / FAX: 65-6744-9228

#### **Delta Power Solutions (India) Pte. Ltd.**

Plot No. 28, Sector-34, EHTP  
Gurgaon-122001 Haryana, India  
TEL: 91-124-416-9040 / FAX: 91-124-403-6045

### **America**

#### **Delta Products Corporation (USA)**

##### **Raleigh Office**

P.O. Box 12173, 5101 Davis Drive,  
Research Triangle Park, NC 27709, U.S.A.  
TEL: 1-919-767-3813 / FAX: 1-919-767-3969

#### **Delta Greentech (Brasil) S/A**

##### **Sao Paulo Office**

Rua Itapeva, N° 26, 3° andar, Bela vista  
ZIP: 01332-000 - São Paulo - SP - Brasil  
TEL : 55-11-3568-3875 / FAX : 55-11-3568-3865

### **Europe**

#### **Deltronics (The Netherlands) B.V.**

##### **Eindhoven Office**

De Witbogt 15, 5652 AG Eindhoven, The Netherlands  
TEL: 31-40-2592850 / FAX: 31-40-2592851

\*We reserve the right to change the information in this catalogue without prior notice



# VFD-E

High Performance / Flexible Extension /  
Micro Type AC Motor Drive



www.delta.com.tw/industrialautomation



## Features

### • Modular Design

Modular structure and extension with optional cards

### • Standard MODBUS Protocol

Standard MODBUS Protocol via RS-485

### • Built-in EMI Filter (230V 1-phase and 460V 3-phase)

To reduce electromagnetic interference efficiently

### • Compact Design

Space saving and easy DIN rail mounting with optional DIN rail adapter

### • Optional Fieldbus Modules

Provide connection to a variety of networks, including Profibus, DeviceNet, LonWorks and CANopen

### • Flexible Extension

Via optional cards, such as I/O card, Relay card, PG (Encoder) card and USB card, to meet your application requirements



### • RFI-Switch for IT Mains

Removable "Y" capacitor to use with IT mains supplies.



### • Easy DC BUS Sharing

Multiple VFD-E can be connected in parallel to share the regenerative braking energy. In this way, over-voltage is prevented and the DC-bus voltage stabilized.

### • Complete Protection Function

High precision current detection, full overload protection (oL, oL1 and oL2), over-voltage/over-current stall prevention, short-circuit protection, reset after fault, speed search function and motor overheat protection by PTC.

### • Removable Keypad

The standard keypad acts as status monitor. More functions, including parameter modification, RUN/STOP, speed change, and status display, via optional keypad




### • Power Range

- 1-phase 115V series: 0.2~0.75kW (0.25~1hp)
- 1-phase 230V series: 0.2~2.2kW (0.25~3hp)
- 3-phase 230V series: 0.2~7.5kW (0.25~20hp)
- 3-phase 460V series: 0.4~22kW (0.50~30hp)

### • Built-in PLC Function

Easy to write PLC program without additional PLC

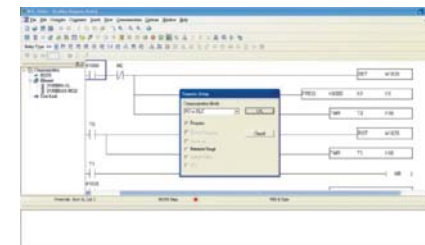

### • Side-by-side Installation(40°C)

High-efficiency cooling and flexible space



### • Easy Maintenance

Removable cooling fan for easy maintenance



## Application Cases

### • Vacuum compressor

It reduces the large load of instant vacuum with VFD-E outstanding overload capacity.




### • Escalator


It not only saves energy with built-in PLC function and multi-step speed but also eliminates cost of external controller.




## Standard Wiring Diagram

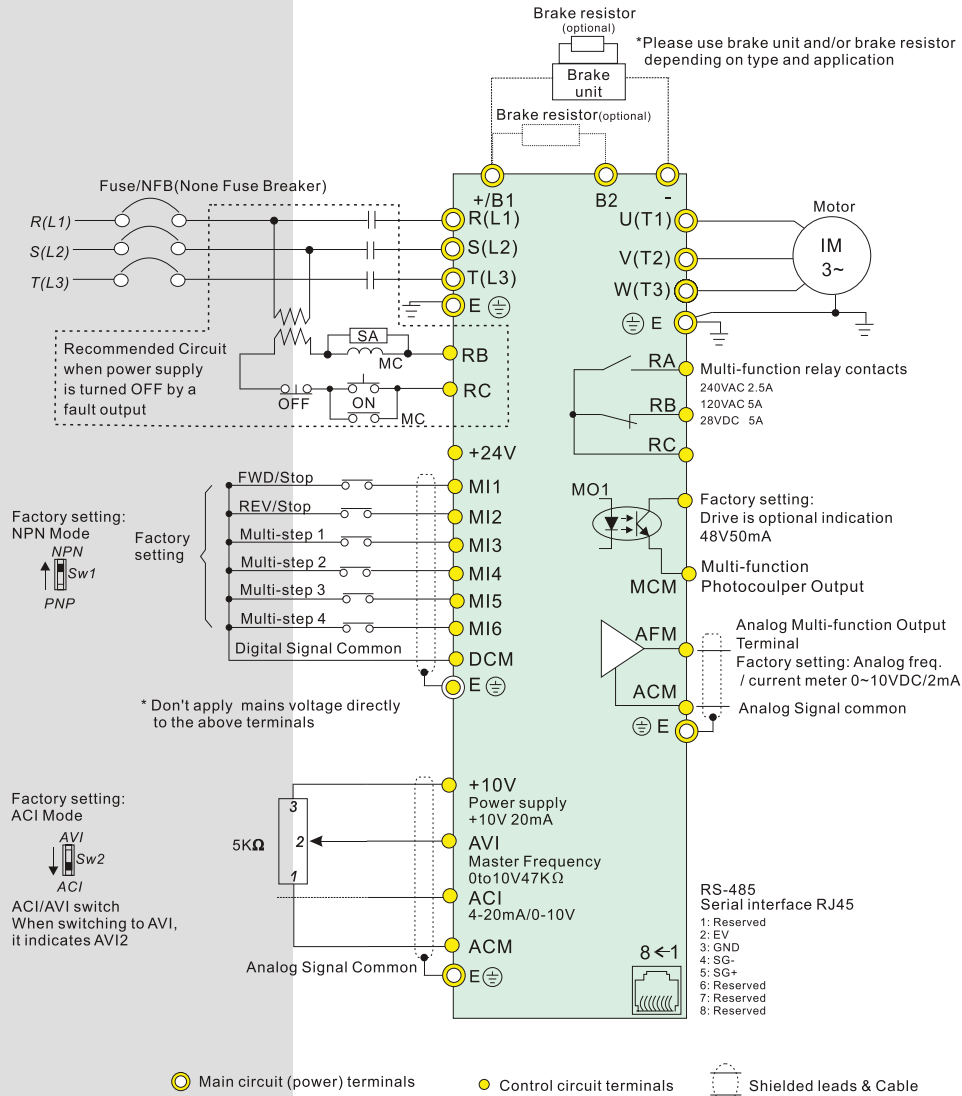


## External Parts

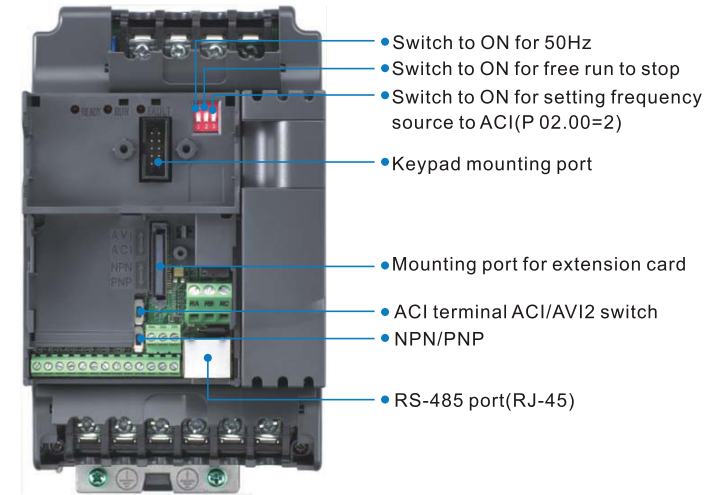

## Control Terminals

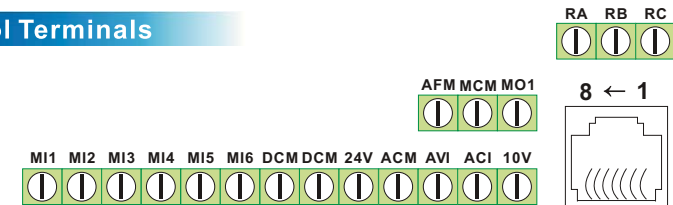

## Model Explanation

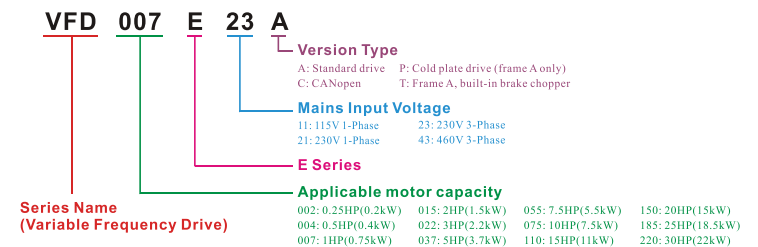



## Application Fields

### Conveyor and Transportation Machinery

- Conveyor belt
- Escalator
- Automatic doors
- Parking device
- Roller door
- Small elevator
- X-Y axis of traveling crane

### Food Processing


- Dumpling maker
- Food stirrer
- Noodle maker

### Machine Tool/Metal Processing Machinery

- Grinder
- Drill
- Small lathe
- Milling machines
- Injection molding (clamp)

### Wood Working Machinery

- 4 side planer
- Wood carver
- Wood working machine
- Simple cutting machine for wood working
- Spraying machine

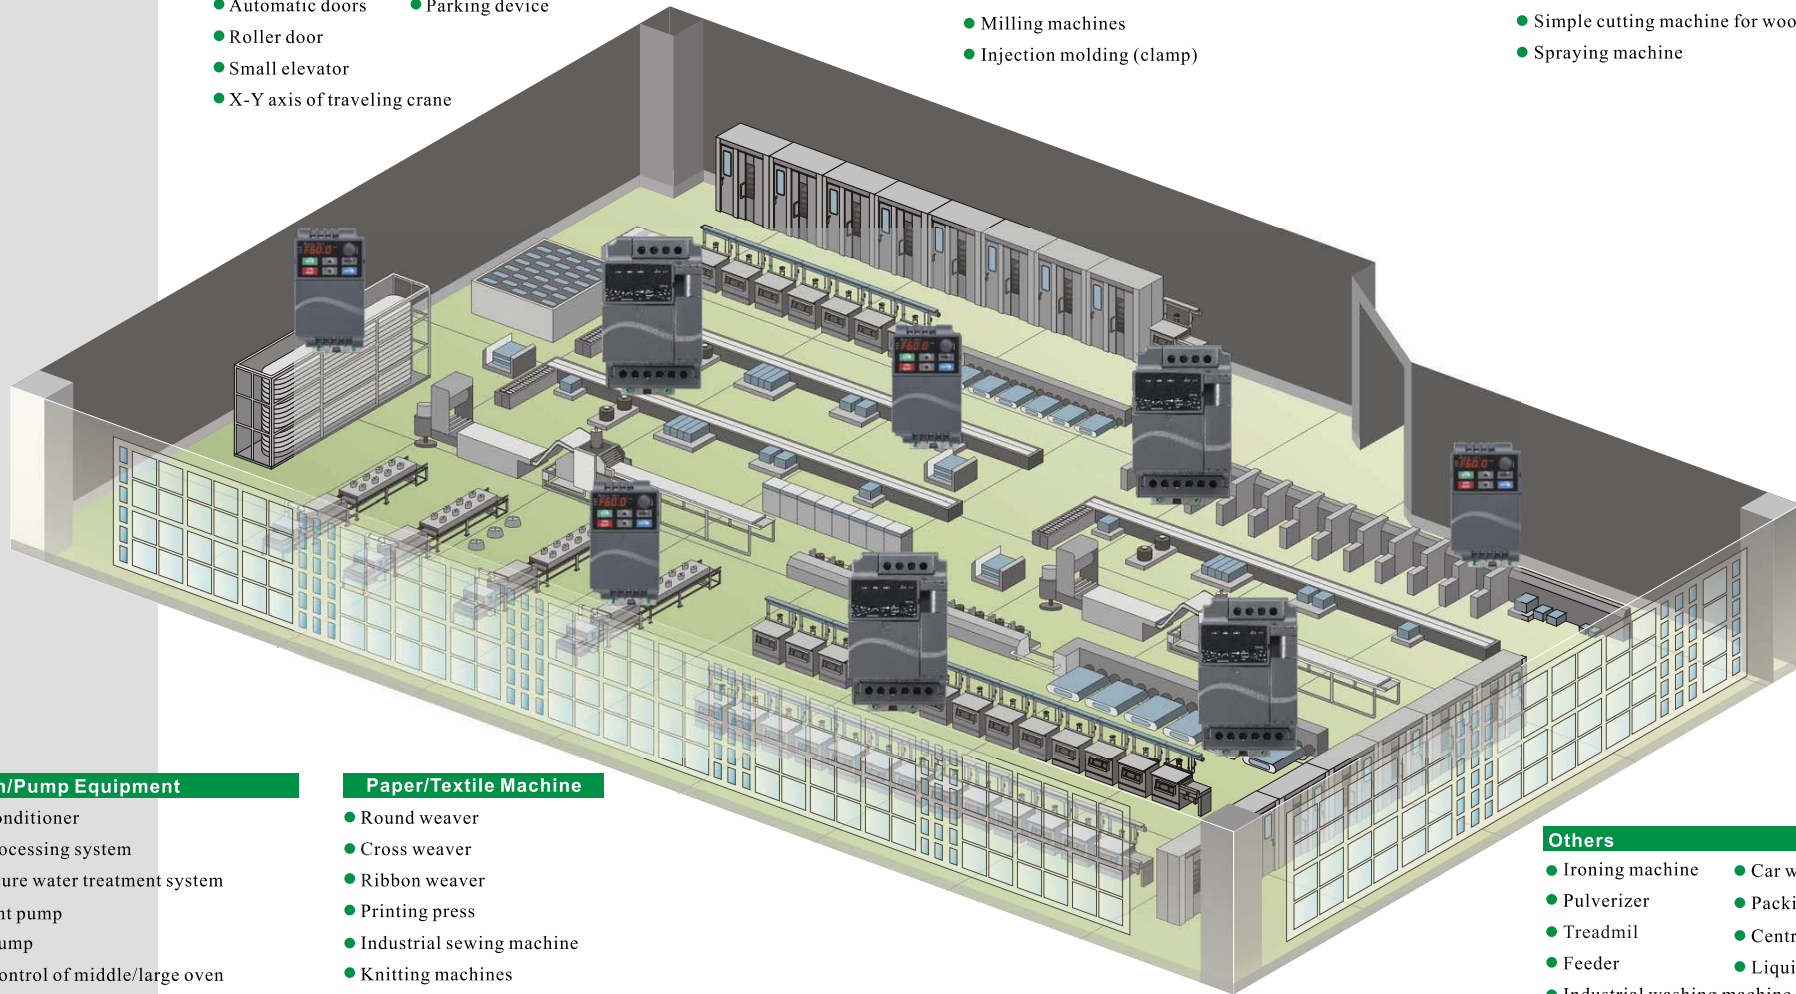

### Fan/Pump Equipment


- Building air conditioner
- Wastewater processing system
- Constant pressure water treatment system
- Water treatment pump
- Agricultural pump
- Temperature control of middle/large oven
- Air compressor
- Heat exchange fans
- Building water dispenser system
- Dryer's windmill

### Paper/Textile Machine

- Round weaver
- Cross weaver
- Ribbon weaver
- Printing press
- Industrial sewing machine
- Knitting machines

### Others

- Ironing machine
- Car washing machine
- Pulverizer
- Packing machine
- Treadmil
- Centrifuge
- Feeder
- Liquid mixer
- Industrial washing machine

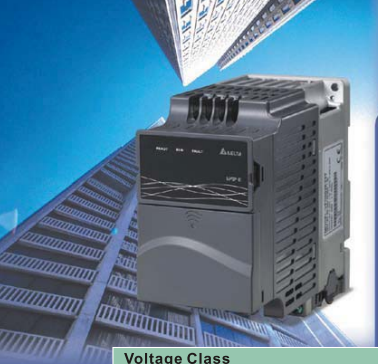

## Specifications


<b>Voltage Class</b>	115V		
<b>Model Number</b> VFD-___ E	002	004	007
<b>Max. Applicable Motor Output (kW)</b>	0.2	0.4	0.75
<b>Max. Applicable Motor Output (hp)</b>	0.25	0.5	1.0
<b>Rated Output Capacity (kVA)</b>	0.6	1.0	1.6
<b>Rated Output Current (A)</b>	1.6	2.5	4.2
<b>Maximum Output Voltage (V)</b>	3-phase proportional to twice the input voltage		
<b>Output Frequency (Hz)</b>	0.1~600Hz		
<b>Carrier Frequency (kHz)</b>	1-15		
<b>Rated Input Current (A)</b>	Single-phase		
	6	9	18
<b>Rated Voltage/Frequency</b>	Single phase 100-120V, 50/60Hz		
<b>Voltage Tolerance</b>	± 10%(90-132V)		
<b>Frequency Tolerance</b>	± 5%(47-63Hz)		
<b>Cooling Method</b>	Natural Cooling		Fan Cooling
<b>Weight (kg)</b>	1.2	1.2	1.2

<b>Voltage Class</b>	230V									
<b>Model Number</b> VFD-___ E	002	004	007	015	022	037	055	075	110	150
<b>Max. Applicable Motor Output (kW)</b>	0.2	0.4	0.75	1.5	2.2	3.7	5.5	7.5	11	15
<b>Max. Applicable Motor Output (hp)</b>	0.25	0.5	1.0	2.0	3.0	5.0	7.5	10.0	15	20
<b>Rated Output Capacity (kVA)</b>	0.6	1.0	1.6	2.9	4.2	6.5	9.5	12.5	17.1	25
<b>Rated Output Current (A)</b>	1.6	2.5	4.2	7.5	11.0	17	25	33	45	65
<b>Maximum Output Voltage (V)</b>	3-phase proportional to input voltage									
<b>Output Frequency (Hz)</b>	0.1~600Hz									
<b>Carrier Frequency (kHz)</b>	1-15									
<b>Rated Input Current (A)</b>	Single/3-phase					3-phase				
	4.9/1.9	6.5/2.7	9.7/5.1	15.7/9	24/15	20.6	26	34	48	70
<b>Rated Voltage/Frequency</b>	Single/3-phase, 200-240V, 50/60Hz					3-phase, 200-240V, 50/60Hz				
<b>Voltage Tolerance</b>	± 10%(180-264V)									
<b>Frequency Tolerance</b>	± 5%(47-63Hz)									
<b>Cooling Method</b>	Natural Cooling					Fan Cooling				
<b>Weight (kg)</b>	1.1	1.1	1.1	1.9	1.9	1.9	3.5	3.5	3.57	6.6

<b>Voltage Class</b>	460V										
<b>Model Number</b> VFD-___ E	004	007	015	022	037	055	075	110	150	185	220
<b>Max. Applicable Motor Output (kW)</b>	0.4	0.75	1.5	2.2	3.7	5.5	7.5	11.0	15	18.5	22
<b>Max. Applicable Motor Output (hp)</b>	0.5	1.0	2.0	3.0	5.0	7.5	10.0	15.0	20	25	30
<b>Rated Output Capacity (kVA)</b>	1.2	2.0	3.3	4.4	6.8	9.9	13.7	18.3	24	29	34
<b>Rated Output Current (A)</b>	1.5	2.5	4.2	5.5	8.5	13.0	18.0	24.0	32	38	45
<b>Maximum Output Voltage (V)</b>	3-phase proportional to input voltage										
<b>Output Frequency (Hz)</b>	0.1~600Hz										
<b>Carrier Frequency (kHz)</b>	1-15										
<b>Rated Input Current (A)</b>	3-phase										
	1.9	3.2	4.3	7.1	11.2	14	19	26	35	41	49
<b>Rated Voltage/Frequency</b>	3-phase, 380-480V, 50/60Hz										
<b>Voltage Tolerance</b>	± 10%(342-528V)										
<b>Frequency Tolerance</b>	± 5%(47-63Hz)										
<b>Cooling Method</b>	Natural Cooling					Fan Cooling					
<b>Weight (kg)</b>	1.2	1.2	1.2	1.9	1.9	4.2	4.2	4.2	7.47	7.47	7.47

<b>Control Characteristics</b>	<b>Control System</b>	SPWM (Sinusoidal Pulse Width Modulation) Control (V/f or sensorless vector control)	
	<b>Frequency Setting Resolution</b>	0.01Hz	
	<b>Output Frequency Resolution</b>	0.01Hz	
	<b>Torque Characteristics</b>	Including the auto-torque/auto-slip compensation; starting torque can be 150% at 3.0Hz	
	<b>Overload Endurance</b>	150% of rated current for 1 minute	
	<b>Skip Frequency</b>	Three zones, setting range 0.1~600Hz	
	<b>Accel/Decel Time</b>	0.1 to 600 seconds (2 Independent setting of Accel/Decel time)	
	<b>Stall Prevention Level</b>	Setting 20 to 250% of rated current	
	<b>DC Braking</b>	Operation frequency 0.1~600.0Hz, output 0~100% rated current Start time 0~60 seconds, stop time 0~60 seconds	
	<b>Regenerated Braking Torque</b>	Approx. 20% (up to 125% possible with optional brake resistor or externally mounted brake unit, 1-15hp models (built-in brake chopper))	
<b>Operating Characteristics</b>	<b>V/f Pattern</b>	Adjustable V/f pattern Setting by ▲▼	
	<b>Frequency Setting</b>	<b>Keypad</b>	Setting by ▲▼
		<b>External Signal</b>	Potentiometer-5kΩ/0.5W, 0 to +10VDC, 4 to 20mA, RS-485 interface; Multi-function Inputs 3 to 9 (15 steps, Jog, up/down)
	<b>Operation Setting Signal</b>	<b>Keypad</b>	Set by RUN and STOP
		<b>External Signal</b>	2 wires/3 wires (FWD, REV, EF), JOG operation, RS-485 serial interface (MODBUS), programmable logic controller
	<b>Multi-function Input Signal</b>	Multi-step selection 0 to 15, Jog, accel/decel inhibit, 2 accel/decel switches, counter, external Base Block (NC, NO), auxiliary motor control is invalid, ACI/AVI/AUI selections, driver reset, UP/DOWN key settings, sink/source (=NPN/PNP) selection	
<b>Multi-function Output Indication</b>	AC drive operating, frequency attained, non-zero frequency, Base Block, fault indication, local/remote indication, auxiliary motor output, drive is ready, overheat alarm, emergency stop and status selections of input terminals (NC/NO)		
<b>Analog Output Signal</b>	Output frequency/current		
<b>Alarm Output Contact</b>	Contact will be On when drive malfunctions (1 Form C/change-over contact or 1 open collector output)		
<b>Operation Functions</b>	Built-in PLC, AVR, accel/decel S-Curve, over-voltage/over-current stall prevention, 5 fault records, reverse inhibition, momentary power loss restart, DC braking, auto torque/slip compensation, auto tuning, adjustable carrier frequency, output frequency limits, parameter lock/reset, vector control, PID control, external counter, MODBUS communication, abnormal reset, abnormal re-start, power-saving, sleep/wake function, fan control, 1st/2nd frequency source selections, 1st/2nd frequency source combination, NPN/PNP selection		
<b>Protection Functions</b>	Over voltage, over current, under voltage, under current, external fault, overload, ground fault, overheating, electronic thermal, IGBT short circuit, PTC		
<b>Display Keypad</b>	6-key, 7-segment LED with 4-digit, 5 status LED, master frequency, output frequency, output current, custom units, parameter values for setup and lock, faults, RUN, STOP, RESET, FWD/REV		
<b>Built-in EMI Filter</b>	For 230V 1-phase and 460V 3-phase models		
<b>Environmental Conditions</b>	<b>Enclosure Rating</b>	IP20	
	<b>Pollution Degree</b>	2	
	<b>Installation Location</b>	Altitude 1,000m or lower, keep from corrosive gasses, liquid and dust	
	<b>Ambient Temperature</b>	-10°C to + 50°C (40°C for side-by-side mounting) Non-Condensing and not frozen	
	<b>Storage/Transportation Temperature</b>	-20°C to 60°C	
	<b>Ambient Humidity</b>	Below 90% RH (non-condensing)	
	<b>Vibration</b>	9.80665m/s <sup>2</sup> (1G) less than 20Hz, 5.88m/s <sup>2</sup> (0.6G) at 20 to 50Hz	
<b>Approvals</b>	  		

## Dimensions

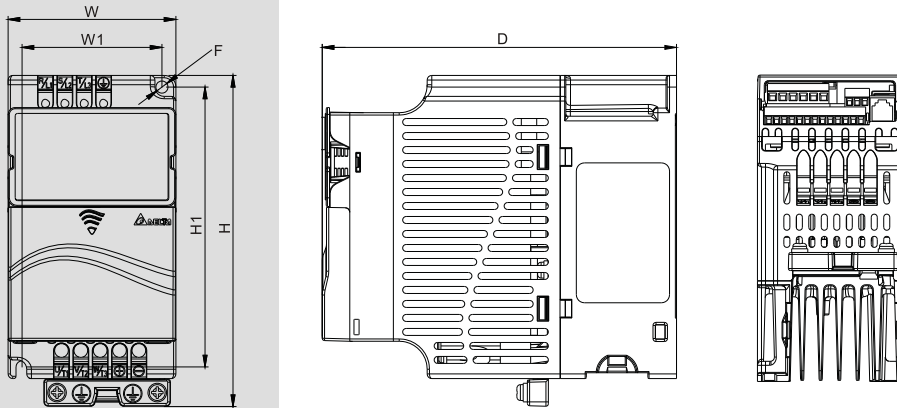

Unit: mm(inch)

Model	W	W1	H	H1	D	F	
VFD002E11A/11/11C VFD002E21A/21T/21C VFD002E23A/23T/23C VFD004E11A/11T/11C VFD004E21A/21T/21C VFD004E23A/23T/23C VFD004E43A/43T/43C	VFD007E21A/21T/21C VFD007E23A/23T/23C VFD007E43A/43T/43C VFD015E23A/23T/23C VFD015E43A/43T/43C	72.0 (2.83)	60.0 (2.36)	142.0 (5.59)	120.0 (4.72)	152.0 (5.98)	5.2 (0.20)
VFD007E11A/11C VFD015E21A/21C VFD022E21A/21C VFD022E23A/23C VFD022E43A/43C	VFD037E23A/23C VFD037E43A/43C	100.0 (3.94)	89.0 (3.51)	174.0 (6.86)	162.0 (6.38)	152.0 (5.98)	5.5 (0.22)
VFD055E23A/23C VFD055E43A/43C VFD075E23A/23C	VFD075E43A/43C VFD110E43A/43C	130.0 (5.12)	116.0 (4.57)	260.0 (10.24)	246.5 (9.71)	169.2 (6.67)	5.5 (0.22)
VFD150E23A/23C VFD150E43A/43C	VFD185E43A/43C VFD220E43A/43C	200.0 (7.87)	180.0 (7.09)	310.0 (12.20)	290.0 (11.42)	190.0 (7.48)	10.0 (0.39)
VFD002E11P VFD002E21P VFD002E23P VFD004E11P VFD004E21P VFD004E23P VFD004E43P	VFD007E21P VFD007E23P VFD007E43P VFD015E23P	72.0 (2.83)	56.0 (2.20)	155.0 (6.10)	143.0 (5.63)	111.5 (4.39)	5.3 (0.21)

## New Models

- VFD-E-T : Built-in brake chopper for frame A
- VFD-E-P : Plate drive
- VFD-E-C : Built-in CANopen communication

## Accessories

### Optional Cards



■ **EME-R3AA**  
Relay card (3 form A/  
NO contacts)



■ **EME-R2CA**  
Relay card (2 form C/  
Change-over contacts)



■ **EME-33A**  
I/O card  
(photocoupler 3in+3out)



■ **EME-A22A**  
Anglog I/O Card (12 bits)



■ **EME-PG01**  
PG card



■ **CME-USB01**  
Second communication card  
(USB1.1)

### Fieldbus Modules



■ **DeviceNet**



■ **Profibus**



■ **LonWorks**



■ **CANopen**

### Others



■ **Digital keypad**



■ **Brake resistor**

- Keypad for communication (VFD-PU06)
- Zero phase reactor
- Keypad cable
- DIN rail(Width35mm)
- EMI input filter
- Grounding plate
- Brake unit
- DC fan
- AC reactor